

**PRV**PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

REC'D 08 MAR 2005

WIPO

PCT

**Intyg  
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Appulia Ltd, Isle of Man GB  
Applicant (s)

(21) Patentansökningsnummer 0400427-1  
Patent application number

(86) Ingivningsdatum 2004-02-25  
Date of filing

Stockholm, 2005-02-04

För Patent- och registreringsverket  
For the Patent- and Registration Office

*Hjördis Segerlund*  
Hjördis Segerlund

Avgift  
Fee 170:-

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

## A CORE FOR A CABLE ENTRY DEVICE

### Technical Field

5       The present invention relates to a core for a cable entry device, and more particularly a core for locking the cable entry in a hole of a material, into which the cable entry is inserted.

### 10       Background of the Invention

When a cable or conduit is inserted through a hole of a material, there are a number of methods available for protecting the cable against damage and sealing one side of the material from the other. If the cable is inserted into  
15 the interior atmosphere, of e.g. a cubicle, from the ambient atmosphere, a hole is made in the cubicle for inserting the cable.

A rubber cable entry or grommet may be tightly inserted into the hole of the cubicle, and a cable can be  
20 inserted into the cable entry, causing sealing of the interior atmosphere of the cubicle from the surrounding atmosphere. However, this type of cable entry provides no locking of the cable to the cable entry. Also, it provides no locking of the cable entry to the surrounding material  
25 and may relatively easy be pushed out of the hole. The rubber cable entry known in the art comprises flanges between which the material, in which the cable entry is inserted, is received. The flanges are extending outwardly from the hole on respective sides of the material to  
30 provide sealing. However, when the cable entry is inserted into the hole, one of the flanges has to be pushed through the hole. The material of the flange has to be compressed to pass through the hole. Alternatively, a portion of the flange is pushed through the hole at the time, wherein the  
35 material of the flange does not have to be compressed as much. However, assembling of such a cable entry is

cumbersome, especially for an assembler, who might fit hundreds of cable entries each day. Still another problem with the rubber cable entry is that it only fits material having a predetermined thickness. Different thickness  
5 requires different cable entries.

Another cable entry known in the art solves the problems of locking it to the surrounding material, and locking of the cable to the cable entry. Such a cable entry is generally made of a solid material, comprising several  
10 constituents, with a flexible sealing core. To connect the cable entry to e.g. a cubicle, a cylindrical main part of the fitting has to be provided with a sealing-ring before being entered into a hole of the cubicle. Furthermore, the main part is provided with threads, for locking the main  
15 part to the cubicle by a threaded nut. Alternatively, the surrounding material itself is threaded. Inside the main part is a bushing provided for sealing the space surrounding the cable. Also, the main part is provided with gripping tongues, which press the bushing towards the  
20 cable, causing both sealing and locking of the cable, when a cap is threaded onto the main part.

There is a problem with the cable entry providing locking in that it comprises several constituent parts, have a space-consuming design and is cumbersome to  
25 assemble. Also, when the cable is inserted into the cable entry and the cap is threaded to press the tongues towards the cable, the cable may not be completely locked, since the cable can slip in either direction if pulled, and the tongues may damage the coating of the cable. Furthermore,  
30 although the cable entry is manually adjustable to surrounding material of different thickness, assembling of the cable entry using the nut may be cumbersome, especially if it is assembled in a narrow space.

### Summary of the Invention

It is an object of the invention to provide a core for a cable entry or grommet device, which will enable the cable entry to be instantly connected to a material when inserted into a hole thereof. Another object of the invention is to provide a core for a cable entry or grommet device, which will enable the cable entry to be releasably connected to a material having a hole into which the cable entry is inserted. A further object of the invention is to provide a core for a cable entry or grommet device providing strain relief of a cable inserted into said entry.

A core according to the invention for supporting a covering of a cable entry device achieves the above objects. The core comprises at least one intermediate portion connected to locking means, e.g. comprising a flange and detents. The locking means instantly locks the core to a surrounding material when inserted into a hole thereof. The intermediate portion is extending axially having the flange provided around a first end of the outer periphery of the intermediate portion, and the detents arranged at the outer periphery at a second end thereof.

Each detent may be arranged on a flexible portion extending from a first towards a second end of the intermediate portion. The thickness of the flexible portion at a base thereof is thinner than the thickness of the remaining portion of the flexible portion, which provides improved flexibility of the flexible portions and easy removal of the cable entry.

Alternatively, each detent may be connected to the intermediate portion at a first end thereof, and extend outwardly towards the periphery of the flange.

The core may also have means for providing strain relief, such as flexible tongues radially spaced at an inner circumference of the intermediate portion.

3

Alternatively, the means for providing strain relief is detachably connectable to the core.

The core may be at least partly enclosed by a flexible covering. If at least the intermediate portion is enclosed by the covering, flexible support for the flexible portions are provided.

The means for providing strain relief may be provided integral with the covering. An entry having an internal surface extending in a longitudinal axis of the core is provided for abutting against a cable when inserted through the entry. The surface provides a friction between said surface and the cable, which entry is supported by the core.

Further embodiments of the invention will appear from the dependent claims.

It is an advantage of the invention that the core provides a space saving design due to the locking means for instantly connecting the core to a surrounding material. Furthermore, locking means are provided integral with the core, which decreases the number of constituent parts and the manufacturing cost, and provides a space saving design. Also, as the locking means provides instant connection to a surrounding material, it is very easy to attach to the material, which is preferred when assembled in a narrow space.

#### Brief Description of the Drawings

Further objects, features, and advantages of the invention will appear from the following description of several embodiments of the invention, wherein various

aspects of the invention will be described in more detail with reference to the accompanying drawings, in which:

FIG 1 is a perspective view of a cable entry device;

FIG 2 is a cross-sectional view of a cable entry device with a cable inserted therein;

FIG 3 is a perspective view of a first embodiment of a core comprising means for strain relief;

FIGS 4a and 4b are perspective views of a second embodiment of a core comprising means for locking the core;

FIG 5 is a cross-sectional view of a covering;

FIG 6 is a cross sectional view of another embodiment of the covering;

FIG 7 is a cross sectional view of another embodiment of the covering enclosing the core of FIGS 4a and 4b; and

FIGS 8a and 8b are cross-sectional views of a cable entry comprising a core, a covering and detachable means for strain relief.

#### Detailed Description of the Invention

When a cable 1 is inserted into e.g. a cubicle, there are international standards for tightness classification, such as the IP classification system, that specify to what degree the internal atmosphere of e.g. a cubicle shall be sealed from the ambient atmosphere or fluid. Also, there are physical situations that require a cable 1 to be locked to a certain extent to the cubicle, to provide strain relief. A cable entry or locking grommet is provided for insertion into a hole of a material.

FIG 1 illustrates a first embodiment of a cable entry device 100.

FIG 2 illustrates the cable entry device 100 in cross-section with the cable 1 inserted into it. The cable entry comprises a core 110 enclosed by a covering 200, preferably made of an elastomer, adaptable to a surrounding

material for sealing a space between the cable and the material.

FIG 3 discloses a first embodiment of the core 110 according to the invention. The core 110 comprises an intermediate portion 111 or support element extending axially, which may provide lateral support of the core 110. Locking means connected to the outer periphery of the intermediate portion 111 for instantly connecting the core, and the covering surrounding it, to the surrounding material when inserted into a hole therein. In this embodiment, the locking means comprises a flange 112 and detents 113a, 113b connected to the intermediate portion 111. When the core is inserted into a hole of a material, the diameter of the hole is less than the diameter of the flange 112. Also, the distance between free ends of the detents 113a, 113b, are larger than the diameter of the hole. The diameter of the intermediate portion 111 is less than the diameter of the hole.

The core of FIG 3 is preferably made of a plastic having a certain flexibility, such as a polyamide, e.g. PA 6, that is soften by a softener, which makes the plastic tough.

The detents 113a, 113b are connected to the intermediate portion 111 at one end thereof, and extend from the intermediate portion towards the periphery of the flange 112. Due to the material of the core 110 having a certain flexibility, the free ends of the detents 113a, 113b when pushed through a hole, are urged towards the intermediate portion 111. Thus, the distance between said free ends will be less than the diameter of the hole. Thus, by simply pushing the core through the hole of a material, the free ends of the detents 113a, 113b will be urged towards the intermediate portion. When fully through the hole, the free ends of the detents 113a, 113b, will return to their initial position. Thus, the core is locked to the

surrounding material by means of the detents 113a, 113b and the flange 112, which forms a stop when the core 110 is pushed into the hole. The flange 112 prevents that the core 110 can be pushed through the hole in one direction, preferably from the interior to the exterior of the cubicle. The detents 113a, 113b prevents the core to be pushed back through the hole in the reverse direction.

According to one embodiment of the invention, the core 110 may have means for providing strain relief. At the inside of the intermediate portion 112 are provided radially spaced flexible locking tongues 17 slightly directed in the direction of insertion of the cable 1. When the cable is inserted into the core 110 the tongues will abut the cable. Pulling the cable in the reverse direction will increase the pressure from the tongues towards the cable, wherein the strain relief is provided. The length of the tongues may vary, as will be explained below.

FIGS 4a and 4b disclose another embodiment of a core 150 according to the invention. The core 150 is preferably made of a rigid material, such as described above. The core comprises a first and a second intermediate portion 151a, 151b, and locking means for locking the core 150 to a surrounding material when inserted into a hole thereof. The locking means comprises a flange 152 and a first and second detent 153a, 153b. The flange 152 corresponds to the flange disclosed in FIG 2. The detents 153a, 153b are connected to legs or flexible portions 154a, 154b.

The flange 152 is connected to a first end of the intermediate portions 151a, 151b. The intermediate portions 151a, 151b extend substantially perpendicular from an inner periphery of the flange 152. The length of the flexible portions 154a, 154b correspond substantially to the length of the intermediate portions 151a, 151b. The detents 153a, 153b are connected to an upper portion of the flexible portions 154a, 154b, and extends therefrom towards the



outer periphery of the flange 152. From a tip 155a, 155b of the detents a support surface 156a, 156b extends towards the flexible portions 154a, 154b. A support surface 157 of the flange 152 and the support surface 156a, 156b of the detents 153a, 152b are substantially parallel.

A base 158 of the flexible portions 154a, 154b, are connected to the intermediate portions 154a, 154b adjacent to the flange 152. Thus, although the inherent material characteristics of the core 150 are quite rigid, the width and thickness of the base 158, and the position thereof, provides flexibility of the flexible portions in the lateral direction of the core. In operation, as the support surface 157 of the flange 152 and the support surfaces 156a, 156b of the detents 153a, 153b are substantially perpendicular, the forces exerted on the flexibly portions 154a, 154b are substantially in the longitudinal direction of the flexible portions. Thus, the thickness of the base 158 may be dimensioned to comply with strain relief requirements.

When at least the intermediate portions 154a, 154b are enclosed by a covering, as disclosed below, the flexible portions 154a, 154b, are supported at an inner and outer side of the core 150 by said covering. Thus, the core, which is flexible, allows the flexible portions 154a, 154b to be urged towards the center of the core 150 when pushed through the hole, allowing the detents 153a, 153b to pass through the hole. When fully through, the covering will return the flexible portions to their initial position, wherein the detents instantly connect the core 150 to the surrounding material. The core, and the covering, may easily be detached from the material surrounding it, wherein the cable entry may be reused. The core and the covering may be detached simply by pushing the detents 153a, 153b inwardly towards the center of the core, wherein it may be removed from the hole.

The thickness of the base 158 may be thinner than the remaining thickness of the flexible portions 154a, 154b. Thus, the flexibility may be further increased, whereas the material of the core 150 may be even more rigid. To obtain  
5 a good flexibility, the thickness of the base 158 is approximately 50% of the thickness of the flexible portions 154a, 154b. However, the relationship may be smaller or larger, or even equal, depending on the requirement of flexibility and strength.

10 The flexible portions 154a, 154b, may be provided by forming slots in the intermediate portions 151a, 151b.

In the embodiments shown in FIGS 3, 4a and 4b, the intermediate portions 111, 151a, 151b are substantially cylindrically shaped and extending substantially  
15 perpendicular from the inside of the flange 112, 152 in the longitudinal direction of the core 100, 150. However, the intermediate portions 111, 151a, 151b may also be slightly conically shaped. The intermediate portions 111, 151a, 151b may alternatively have a polygonical cross section, as long  
20 as it fits into a hole of a material. Furthermore, the flange 112, 152 may be divided into sections forming several individual flanges circumferentially spaced around the intermediate portions 111, 151a, 151b. Also, any number of detents 113a, 113b, 153a, 153b, which provide sufficient  
25 locking of the core, is possible.

By altering the distance between the detents 113a, 113b, 153a, 153b and the diameter of the flange 112, 152, core 110, 150 may be adapted to holes of different diameter. Furthermore, by altering the distance between the  
30 free end/tip of the detents 113a, 113b, 153a, 153b and the flange 112, 152, the core 110, 150 may be adapted to material of different thickness.

In FIGS 4a and 4b, the core 150 is illustrated with tongues. However, the core may also be provided without the  
35 tongues.

FIG 5 discloses the covering 200 for enclosing the core 110, 150. In the outer circumference of the covering 200 a recess 210 is provided for receiving the surrounding material when the cable entry is inserted into a hole. The recess 210 provides first and second flexible sealing members 220, 230 in the form of flanges on opposed sides of the recess 210, for sealing the space between the covering and the surrounding material.

The covering 200 has first and second circular cuts 240, 241 provided on a first and second end portion of the covering 200, respectively. A cavity 242 is formed between the end portions. The end portions together with the cavity 242 form a passage, in which the cable 1 is to be inserted.

The first end of the covering surrounding the upper cut 240 forms a flexible collar 243, creating a tight seal between the covering 200 and the cable 1 when the cable 1 is inserted through the first cut 240.

At least one boss (not shown) may be provided on the inside of the collar 243. An early release of vacuum in the cavity 242 is provided by the boss when the tool forming the cavity is pulled out of the first cut 240 during manufacturing. This allows for the manufacture of a very thin membrane, forming a penetrable seal (not shown) of the second cut 241. The penetrable seal can be removed by simply penetrating the cable 1 through the seal rather than using a tool to create a circular hole. The penetrable seal makes it possible to seal a hole in the material surrounding the covering 200 even if the cable 1 is not inserted therein. The penetrable seal may alternatively be provided at the first cut 240. Thus, the boss may be provided at the inside of the second cut 241.

The cavity 242 comprises a circumferentially extending slot 260 for receiving the flange 112, 152 of the core 110, 150. The inner surface of the cavity 242 will enclose the intermediate portions 111, 151a, 151b. The

detents 113, 153a, 153b will extend out of cuts (FIG 1) of the covering when enclosed thereof.

When the core 110 is enclosed by the covering 200, a cylindrical lip 246 may enclose the tongues 114. The lip  
5 246 is connected to covering at the side of the second cut 241, extending therefrom towards the intermediate portion 111. When the cable 1 is inserted into the second cut 241 the tongues 114 enclosed by the lip 246 are abutting, but not damaging, the cable 1. Alternatively, the lip 246 is  
10 partly slit open. Furthermore, the space between the cable 1 and the covering is sealed when the cable 1 is inserted therein.

The tongues 114 and the lip 246 provide a sealed locking of the cable 1 to the cable entry, which locking is  
15 instant when the cable 1 is inserted into the cable entry.

As can be seen in FIG 1 the covering 200 is provided with a cut for receiving the detents 113a, 113b, 153a, 153b. Thus, the detents 113a, 113b, 153a, 153b are not encapsulated by the covering 200 and can directly abut  
20 against the surrounding material.

The second end of the covering 200, to be pushed through a hole in the material has a diameter, which is less than the diameter of the hole. Furthermore, the second sealing member 230 extends outwardly from the second end of  
25 the covering towards the free end of the first sealing member 220. At the free end of the second sealing member 230 the diameter is larger than the diameter of the hole. When pushed through the hole, the second sealing member 230 will be urged towards the center of the covering 200,  
30 wherein the cable entry is easy to insert into the hole of the material, due to the recess 210 between the second sealing member 230 and the center portion of the covering 200.

When the cable entry is inserted into the hole of the  
35 material the flexible first sealing member 220 of the

covering 200 is extending outwardly from an edge of a first side of the material surrounding the hole. When the free end of the first sealing member 220 meets the material it is compressed and slides outwardly from the hole as the cable entry is further pressed through the hole. When the second sealing member 230 is fully through the hole, the second sealing member provides a biasing force on the covering urging the first sealing member towards a second side of the material surrounding the covering 200. Thus, the space between the covering 200 and the surrounding material is sealed, as the free ends of the sealing members 220, 230 abut the material received therebetween. Consequently, the space between the covering 200 and the surrounding material is sealed. If the covering 200 encloses a core, the covering 200 is locked to the hole of the material by means of the locking means, and a seal to both sides of the surrounding material is provided.

In another embodiment, locking means is provided as an integral part of the covering as solid rubber or elastomer detents. However, the arrangement of these detents are substantially the same as the detents as set forth above, albeit formed as integral with the covering. Thus, the elastomer detents are extending outwardly towards the first sealing member 220 of the covering 200 for providing locking of the covering according to the same principles as set out above. If the covering comprises a core, the intermediate portion is provided with cut-in portions for receiving each of the elastomer detents when the cable entry is inserted into a hole.

FIG 6 discloses still another embodiment of a covering 400. A recess 410 is provided in the outer circumference of the covering 400 for forming first and second sealing member 420, 430, such as flexible flanges. The covering 400 comprises means for temporarily receiving a second flange 430 during insertion of the covering into

the hole. One side of the recess 410, which is outwardly facing the sealing members 420, 430 and inwardly facing the intermediate portion of the core, when received therein, or the cavity, has an irregular surface 440. A first portion  
5 441 of the irregular surface 440 has a diameter, which is larger than the diameter of a second portion 442 of the irregular surface 440. The first portion 441 faces outwardly an inner side of the first sealing member 420. The second portion 442 faces outwardly an inner surface of  
10 the second sealing member 430. The difference in diameter between the first and second portions 441, 442 corresponds substantially to twice the thickness of the second sealing member 430 of the covering 400. Thus, when the covering 400 is pressed through a hole, the second sealing member 430 is  
15 received within the second portion of the irregular surface 440, wherein it is even easier to press the covering through the hole as the covering 400 does not have to be compressed at all. The diameter of the first portion 441 of the irregular surface 440 is less than the diameter of the  
20 hole. The diameter of the first portion 441 is preferably only slightly less than the diameter of the hole, wherein the covering 400 is fitted to the surrounding material. Correspondingly, the diameter of the second portion 442 of the irregular surface 440 plus twice the thickness of the  
25 second sealing member 430 of the covering 400 is slightly less than the diameter of the hole.

The length of the first portion 441 of the irregular surface 440, and the total length of the irregular surface 440 is dimensioned such that said first portion will extend  
30 at least partially through the hole when the covering is inserted therein. Thus, when the sealing members 420, 430 extend outwardly from the hole, the covering will be laterally supported by the first portion 441.

The recess 410 and the sealing members 420, 430  
35 according to the embodiment shown in FIG 6 provide instant

adjustment of the covering to different thickness of the surrounding material when the covering is pressed through a hole thereof. The first sealing member 420 extends outwardly from the upper end of the covering. The second sealing member 430 extends outwardly from the second end of the covering 400. The thickness of the sealing members 420, 430 is such that they are flexible at least 90 degrees relative the irregular surface 440. When the covering 400 is inserted into a hole, the free ends of the sealing members 420, 430 will automatically slide outwardly from the hole. The distance between the connection points of the sealing members 420, 430 determines the range of material thickness, to which a specific covering is suitable.

If the covering 400 comprises a core 110, 150, the distance between the support surfaces 155a, 155b of the detents 113a, 113b, 152a, 153b and the size of the recess 410 determines the range of material thickness, to which a specific covering is suitable.

FIG 7 discloses a cable entry 500 comprising a covering 510 and a core 150. Parts of the covering 510 not explicitly described with regard to FIG 7 correspond to the parts described with regard to FIG 6. The covering 510 comprises strain relief means integral with the covering. On an inner side of a first end 520 of the covering 510 facing a cavity 530 of the covering 510 is provided hooks 540 for abutting the cable when inserted into the cavity. When the cable is inserted, the hooks being flexible are urged towards the periphery of the covering 510. When the cable is pulled in the reverse direction, a friction between the cable and the hooks 540 will provide strain relief. The harder the cable is pulled in the reverse direction, the greater is the friction up to a certain amount. The amount of the friction is dependent of the number and material of the hooks 540, and the material of the covering of the cable.

A conically shaped second end 550 opposing the first end 520 of the covering 500 may have means for providing strain relief. At the top end of the conically shaped portion is an inwardly facing circular surface 560 provided. The circular surface extends substantially in the longitudinal direction of the covering 510, i.e. in the direction of insertion of the cable. When a cable is inserted through the covering 510, the circular surface will abut the cable, wherein a friction is created therebetween. When the cable is pulled in the reverse direction the friction will cause the conically shaped portion 550 to be compressed. Thus, a certain strain relief will be provided, the amount of which depending on the size and type of material of the circular surface 560, and the material of the cable. To further increase the strain relief, protrusions 570 may be provided at the outer periphery of the top end of the conical portion 550. When the cable is pulled backwards, the protrusions 550 will cause the circular surface 560 to remain parallel with the cable, wherein the friction is maintained. As long as the conically shaped end 550 does not collapse, i.e. extend in the reverse direction of insertion of the cable 1, strain relief will be provided.

If the covering 500 of FIG 7 comprises a core 150, the conical end 550 when compressed will be urged towards the flange 152 of the core 150. Thus, the covering is more rigid when enclosing a core, wherein it is heavier to compress the conical portion 550. Thus, the strain relief may be even further improved.

FIGS 8a and 8b disclose a cable entry 600 having a core 610 and a covering 620. A detachable strain relief means 630 may be attached at one end of the cable entry 600 to the core 610. The strain relief means comprises tongues 640 as disclosed above. The length of the tongues is alternating shorter and longer. Thus, the strain relief



means fit cables of different size. The strain relief means may comprise two equal halves snap fitted to the core 610. The strain relief means may be detached when the cable is inserted into the cable entry 600, wherein the cable may be removed from the cable entry.

A cable entry may not comprise the core. Thus, the covering as disclosed above may be used without the core, wherein several advantages may still be provided, such as the irregular surface for easy push trough and/or the self-adjustment to different thickness.

The core and covering is disclosed as circular. However, they may equally be multi-lateral depending on the form of the hole into which they should fit.

The covering is made of a flexible material, such as an elastomer, e.g. TPE (thermoplastic elastomer), EPDM (Pthylene-Propylene-Diene-Monomer), or chloroprene.

The present invention has been described as applicable to a cubicle by way of example. However, the invention is not limited to this single application, it is also applicable to holes of many other applications, such as electrical control cubicles, instrument housings, household appliances, cable entries in walls, conduit entries etc. Also, for simplicity reference has been made to a cable, which is not intended to limit the scope of the invention. As is understood, the invention may equally be used with e.g. a conduit for conducting fluids, or a wire. The scope of the invention is best defined of the appended independent claim.

00004-02-2004

Claims

1. A Core (110, 150) for supporting a covering (200, 510, 620) of a cable entry device (100, 500, 600),  
5 **characterized** by at least one axially extending intermediate portion (111, 151a, 151b) connected to a flange and (112, 152) and locking means (112, 113a, 113b, 152, 153a, 153b) for instantly locking the core to a the surrounding material when inserted into a hole thereof.
- 10 2. The core according to claim 1, **characterized** in that the locking means comprises detents (113a, 113b, 153a, 153b).
- 15 3. The core according to claim 1 or 2, **characterized** in that the flange (112, 152) and the detents (113a, 113b, 153a, 153b) have opposing support surfaces (156a, 156b, 157).
- 20 4. The core according to any of the claims 3 to 5, **characterized** in that the support surfaces (156a, 156b, 157) of the flange (152) and the detent (153a, 153b) are parallel.
- 25 5. The core according to claim any of the claims 2 to 4, **characterized** by a flexible portion (154a, 154b) extending from a first end towards a second end of the intermediate portion (151a, 151b), the detents (153a, 153b) are provided at the second end of the flexible portion.
- 30 6. The core according to claim 5, **characterized** in that the thickness of the flexible portion (151a, 151b) at a base (158) thereof is thinner than the thickness of the remaining portion of the flexible portion.
- 35

00004-02-2004



7. The core according to claims 2 or 3, **characterized** in that the flange (112, 152) is connected to a first end of the intermediate portion, and the detent (113a, 113b) is connected to a second end the intermediate portion (111),  
5 the detent extends outwardly towards the periphery of the flange (112).

8. The core according to any of the previous claims, **characterized** by means (114, 640) for providing strain  
10 relief.

9. The core according to claim 8, **characterized** in that the means for providing strain relief comprises flexible tongues (114, 640) extending radially towards the  
15 center of the core and in the direction for insertion of the cable.

10. The core according to claim 9, **characterized** in that the tongues (114, 640) have alternating length.  
20

11. The core according to claim 9 or 10, **characterized** in that the means (114) for providing strain relief is connected to an inner circumference of the intermediate portion.  
25

12. The core according to any of the claims 8 to 10, **characterized** in that the means (640) for providing strain relief is detachably connectable to the core.

13. The core according to any of the previous claims, **characterized** in that at least the intermediate portion (111, 151a, 151b) is enclosed by a flexible covering (200, 510, 620).  
30



14. The core according to claim 13, **characterized** in that the covering (200, 510, 620) encloses the flexible portions (154a, 154b).

5        15. The core according to any of the claims 13 to 14, **characterized** in that the flexible covering (200) comprises a lip (246) for enclosing the means (114) for providing strain relief.

10        16. The core according to claim 11 or 12, **characterized** in that the covering (510) comprises an entry having an internal surface (560) extending in a longitudinal axis of the core (150) for abutting against a cable when inserted through the entry, the entry is  
15 supported by the core (150) when compressed.

17. Use of the core according to any of the claims 1 to 16 together with a covering (400, 510, 620) (500, 600) as a cable entry device for providing sealing in a space  
20 between a cable (1) and a surrounding material, the covering comprising first and second sealing members (420, 430) for receiving said material therebetween formed by a recess (410) in outer periphery of the covering, **characterized** in that the covering comprises means (440,  
25 441, 442) for temporarily receiving the second sealing member during insertion into a hole.

18. Use according to claim 17, **characterized** in that the means for temporarily receiving the second sealing  
30 member comprises a recess of the covering having a depth corresponding to the thickness of the second sealing member (430).

19. Use according to claim 17 or 18, **characterized** in  
35 that the means for temporarily receiving the sealing member

comprises an irregular surface (440) of the covering having a first and a second portion (441, 442), the first portion having a diameter corresponding to the diameter of the hole, to which the device is dimensioned for, and the diameter of the second portion plus twice the thickness of the second sealing member (430) correspond to the diameter of said hole.

20. Use according to claim 19, **characterized** in that the second portion (441) will extend at least partially through the hole when inserted therein.

21. Use according to any of the claims 17 to 20, **characterized** in that the first and second sealing members (420, 430) are flexibly connected to the covering.

22. Use according to any of the claims 17 to 21, **characterized** in that the diameter at a free end of the first sealing member (420) is smaller than the diameter of a free end of the second sealing member (430).

23. Use according to any of the claims 17 to 22, **characterized** in that the first sealing member (420) extends outwardly from a first end of the covering towards the second sealing member, and the second sealing member (430) extends outwardly from a second end of the covering towards the first sealing member.

24. Use according to any of the claims 17 to 23, **characterized** in that the first sealing member provides a biasing force on the covering when inserted into a hole of the material.

25. Use according to claim 24, **characterized** in that the first and second sealing members (220, 230, 420, 430) are flexibly connected to the covering.

5        26. Use according to claim 24 or 25, **characterized** in that the circumference at a free end of the first sealing member (220, 420) is larger than the circumference of a free end of the second sealing member (230, 430).

10       27. Use according to any of the claims 24 to 26, **characterized** in that free ends of the first and second sealing members (220, 230, 420, 430) abut a first and a second side of a material, respectively, when inserted into a hole therein.

15       28. Use according to any of the claims 24 to 27, **characterized** in that the first sealing member (220, 420) extends outwardly from a first end of the covering towards the second sealing member (230, 430), and the second  
20       sealing member extends outwardly from a second end of the covering towards the first sealing member.

### Abstract

A core (110, 150) for supporting a covering (200, 510, 620) of a cable entry device (100, 500, 600). The core  
5 comprises at least one intermediate portion (111, 151a, 151b) connected to locking means (112, 113a, 113b, 152, 153a, 153b). The locking means are connected to the intermediate portion for instantly locking the core to a surrounding material when inserted into a hole thereof.

10

To be published together with FIG 3.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100

1/9


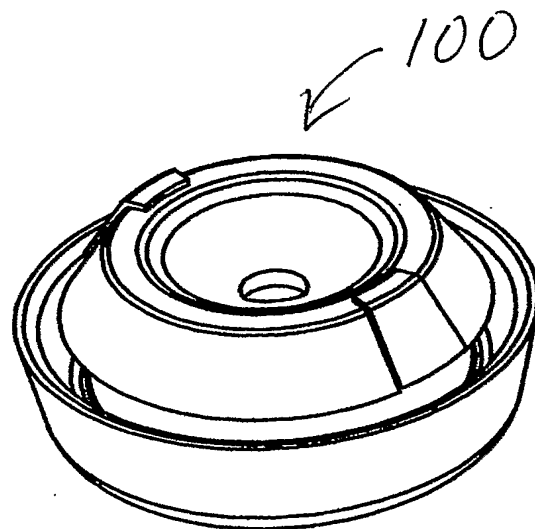


FIG 1

0400427-1




2/9

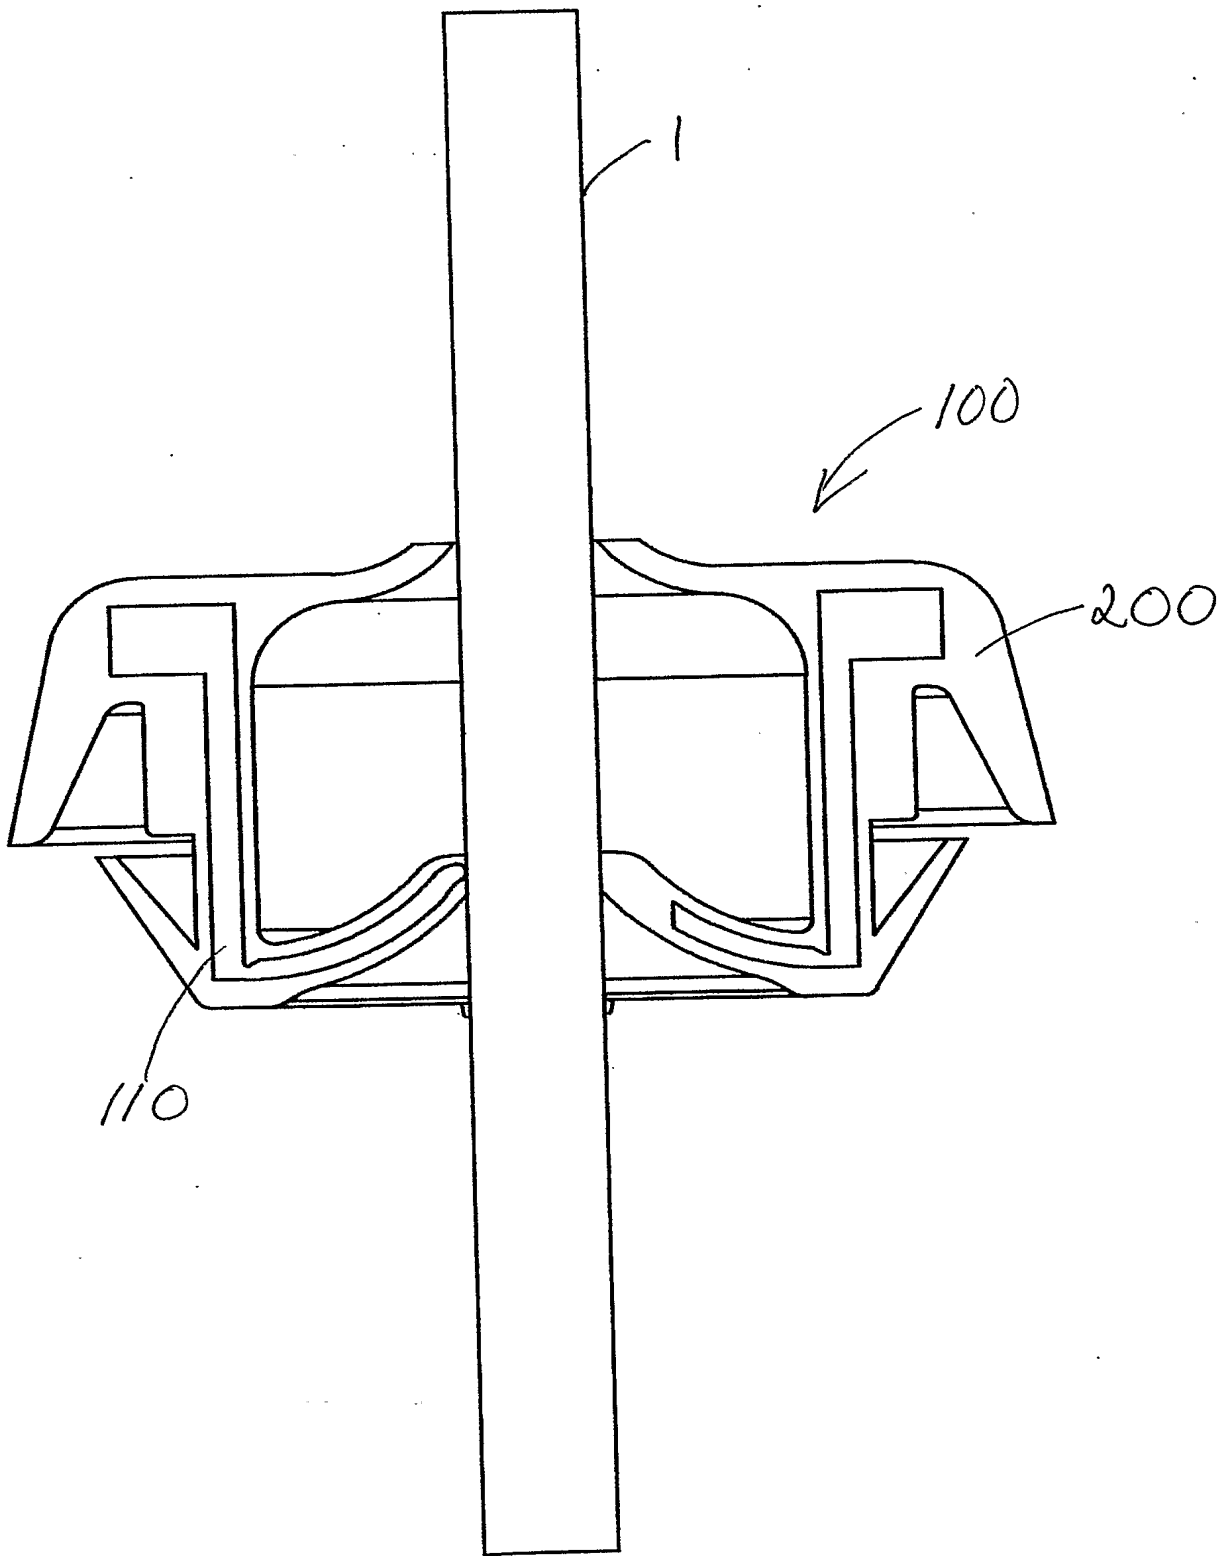

F167 2

0400427-1


3/9

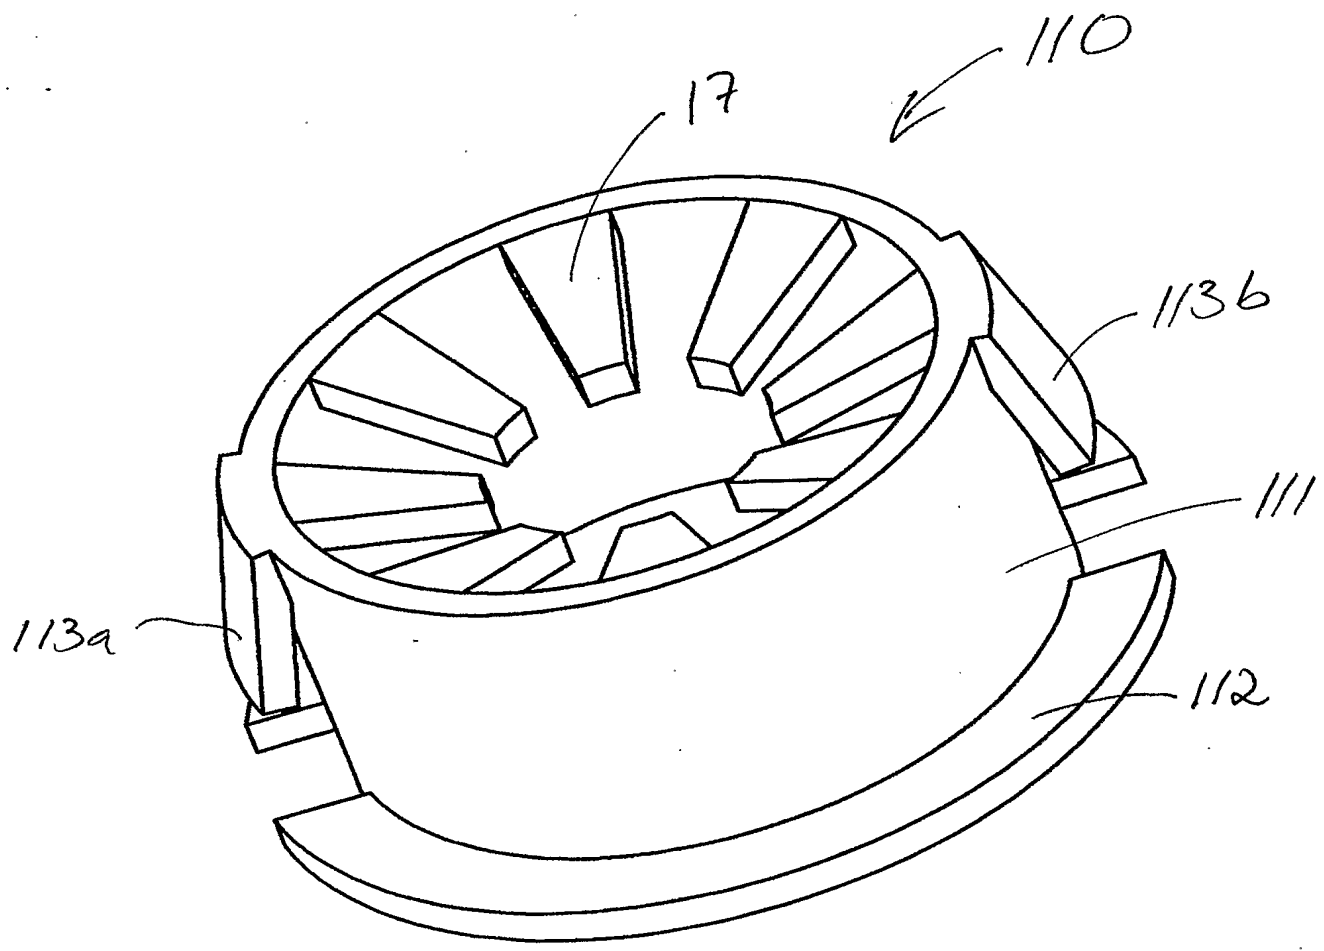

F163


04100-2551

4/9

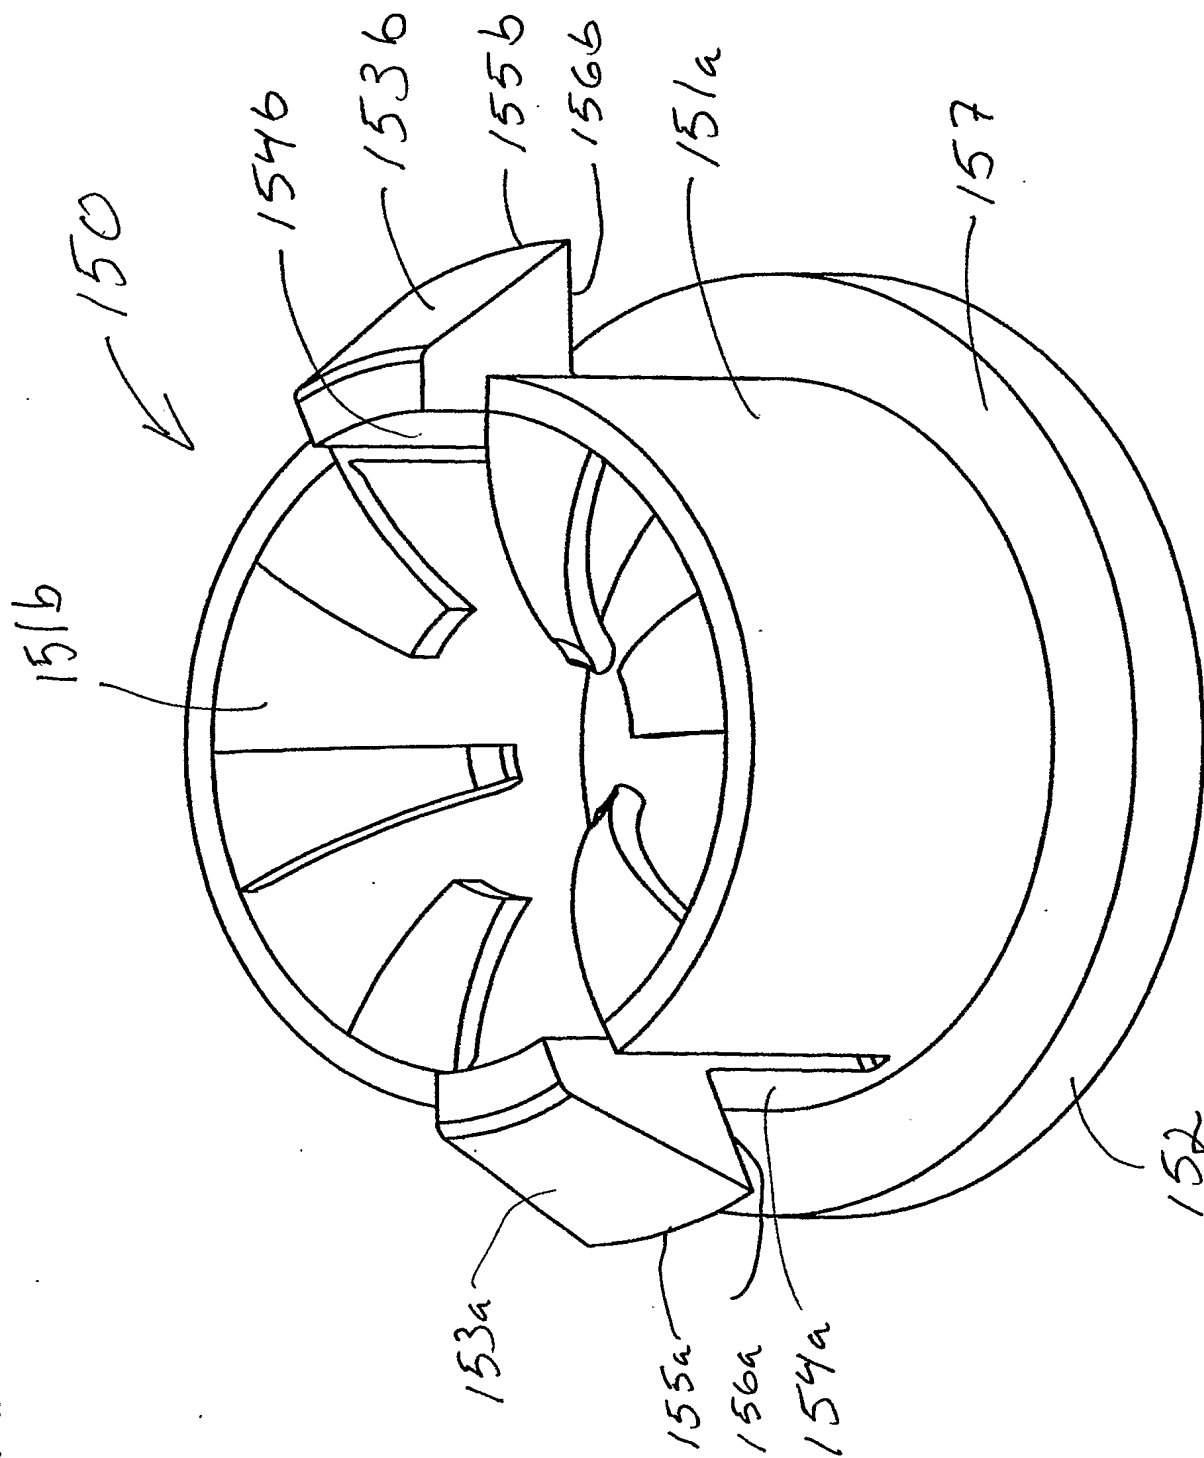

F1674a

5/9

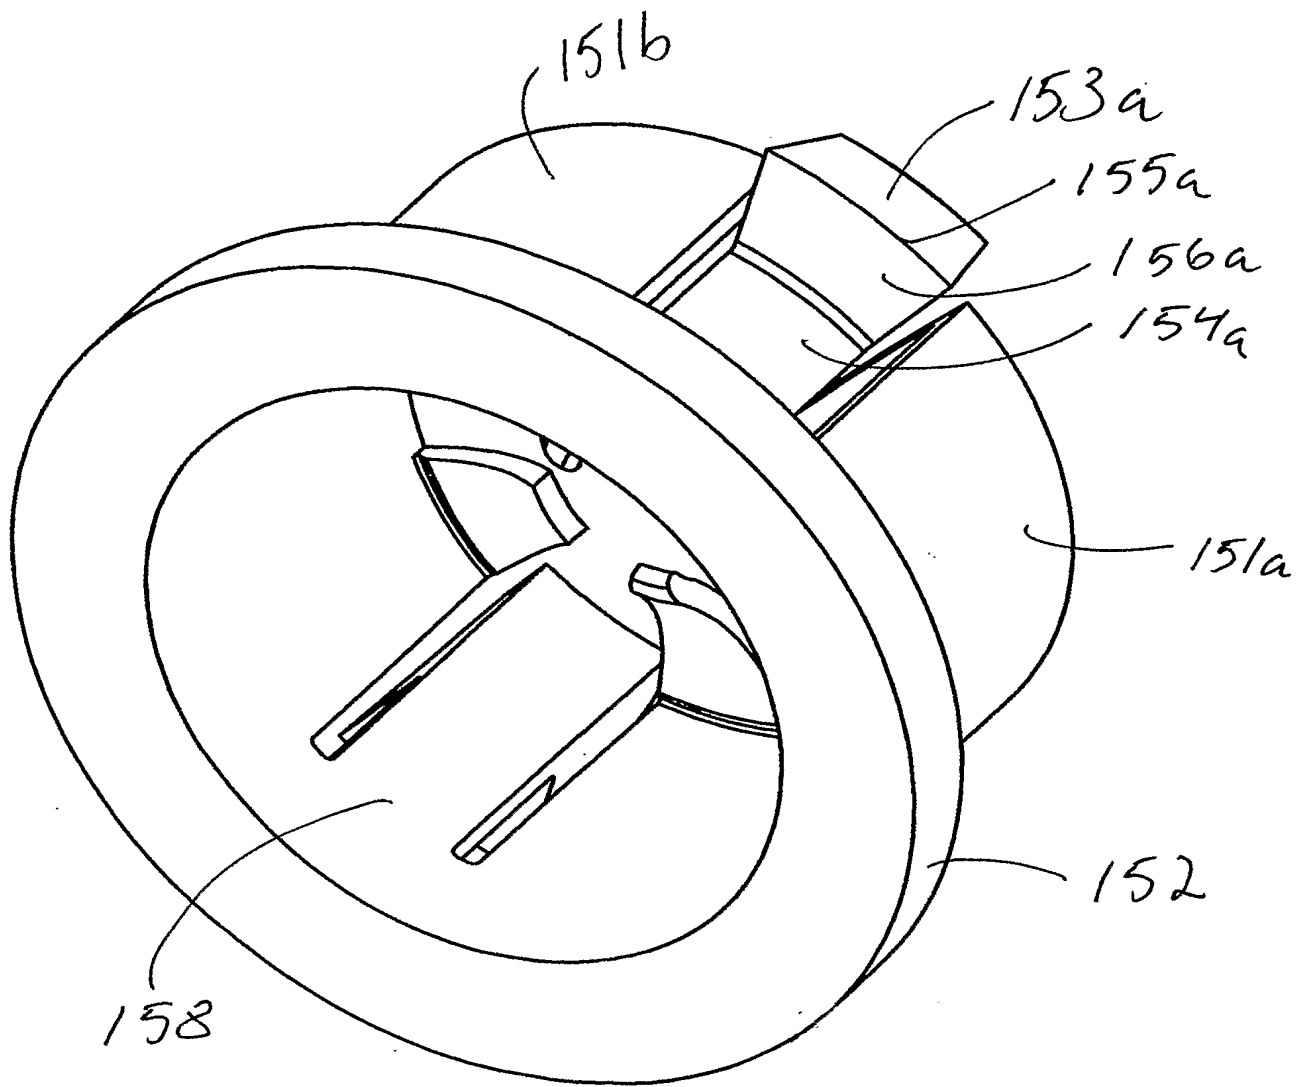

F 167 46

6/9

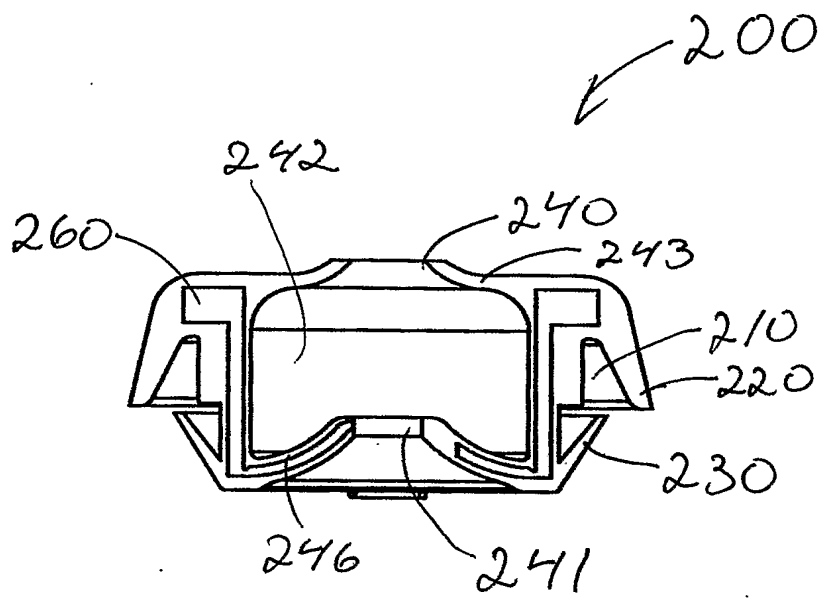


FIG 5


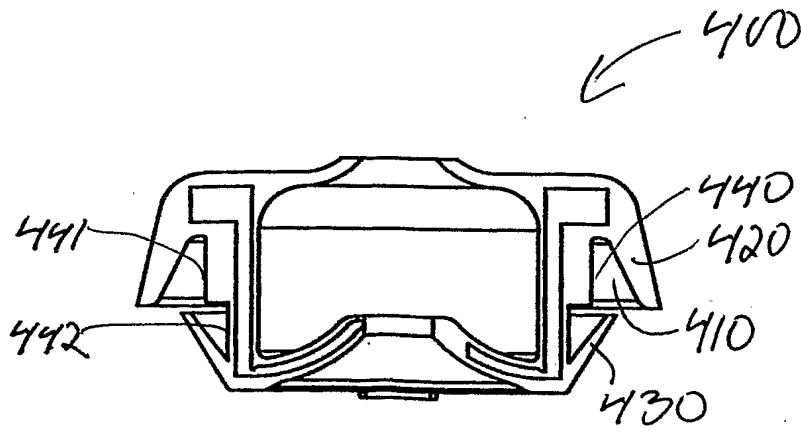


FIG 6

04004271

7/9

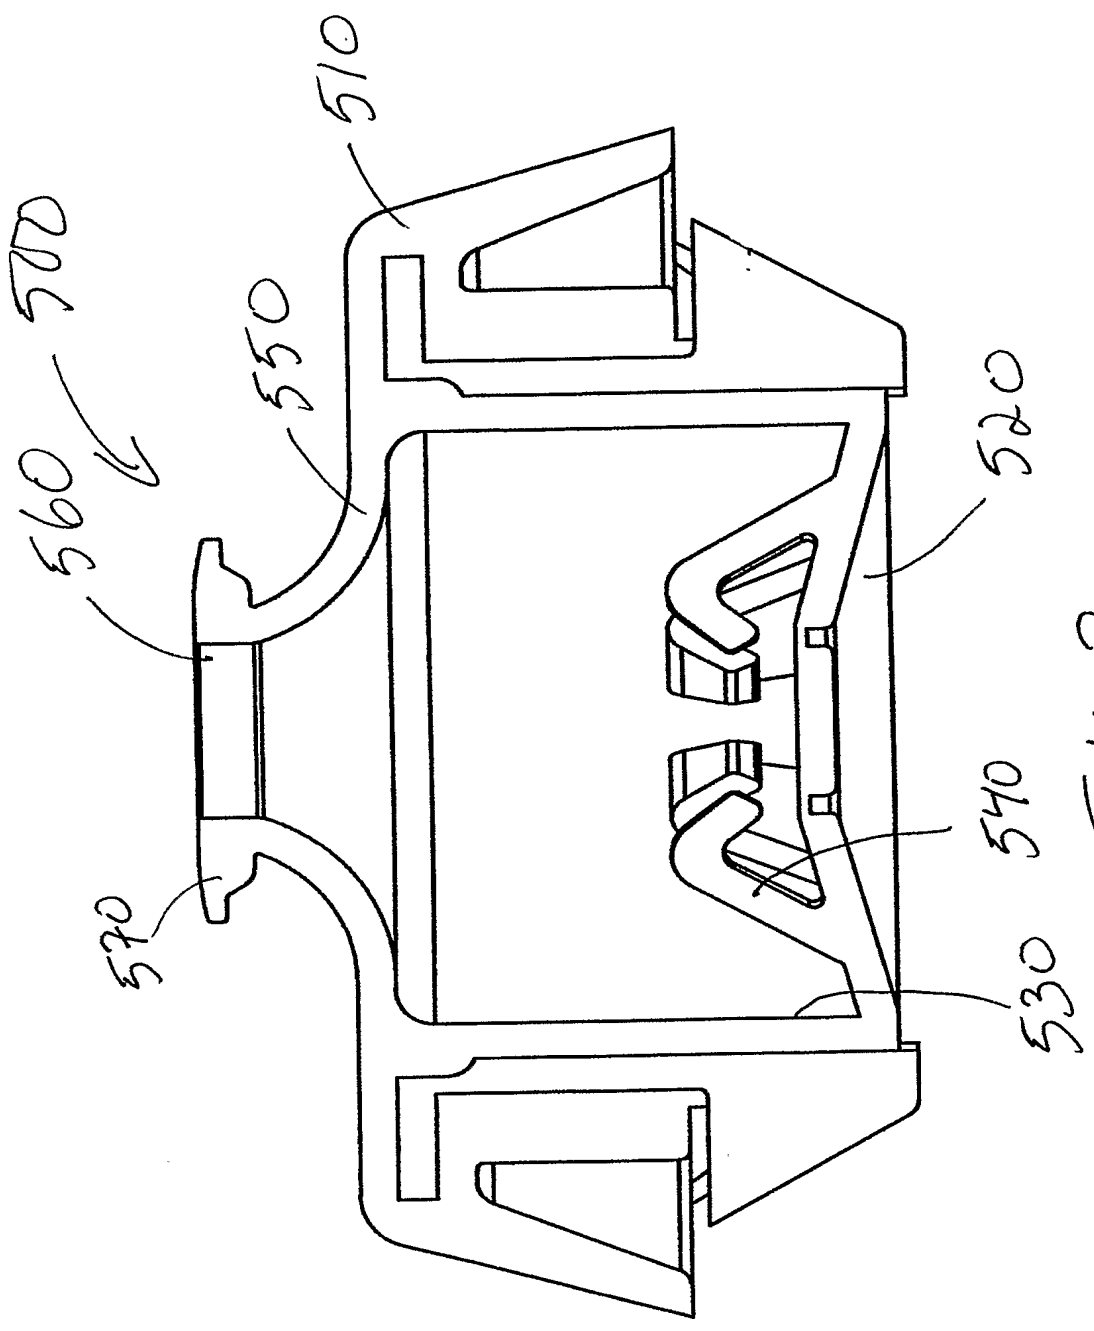

F1617

0400427


8/9

600

630


620

F16 8a

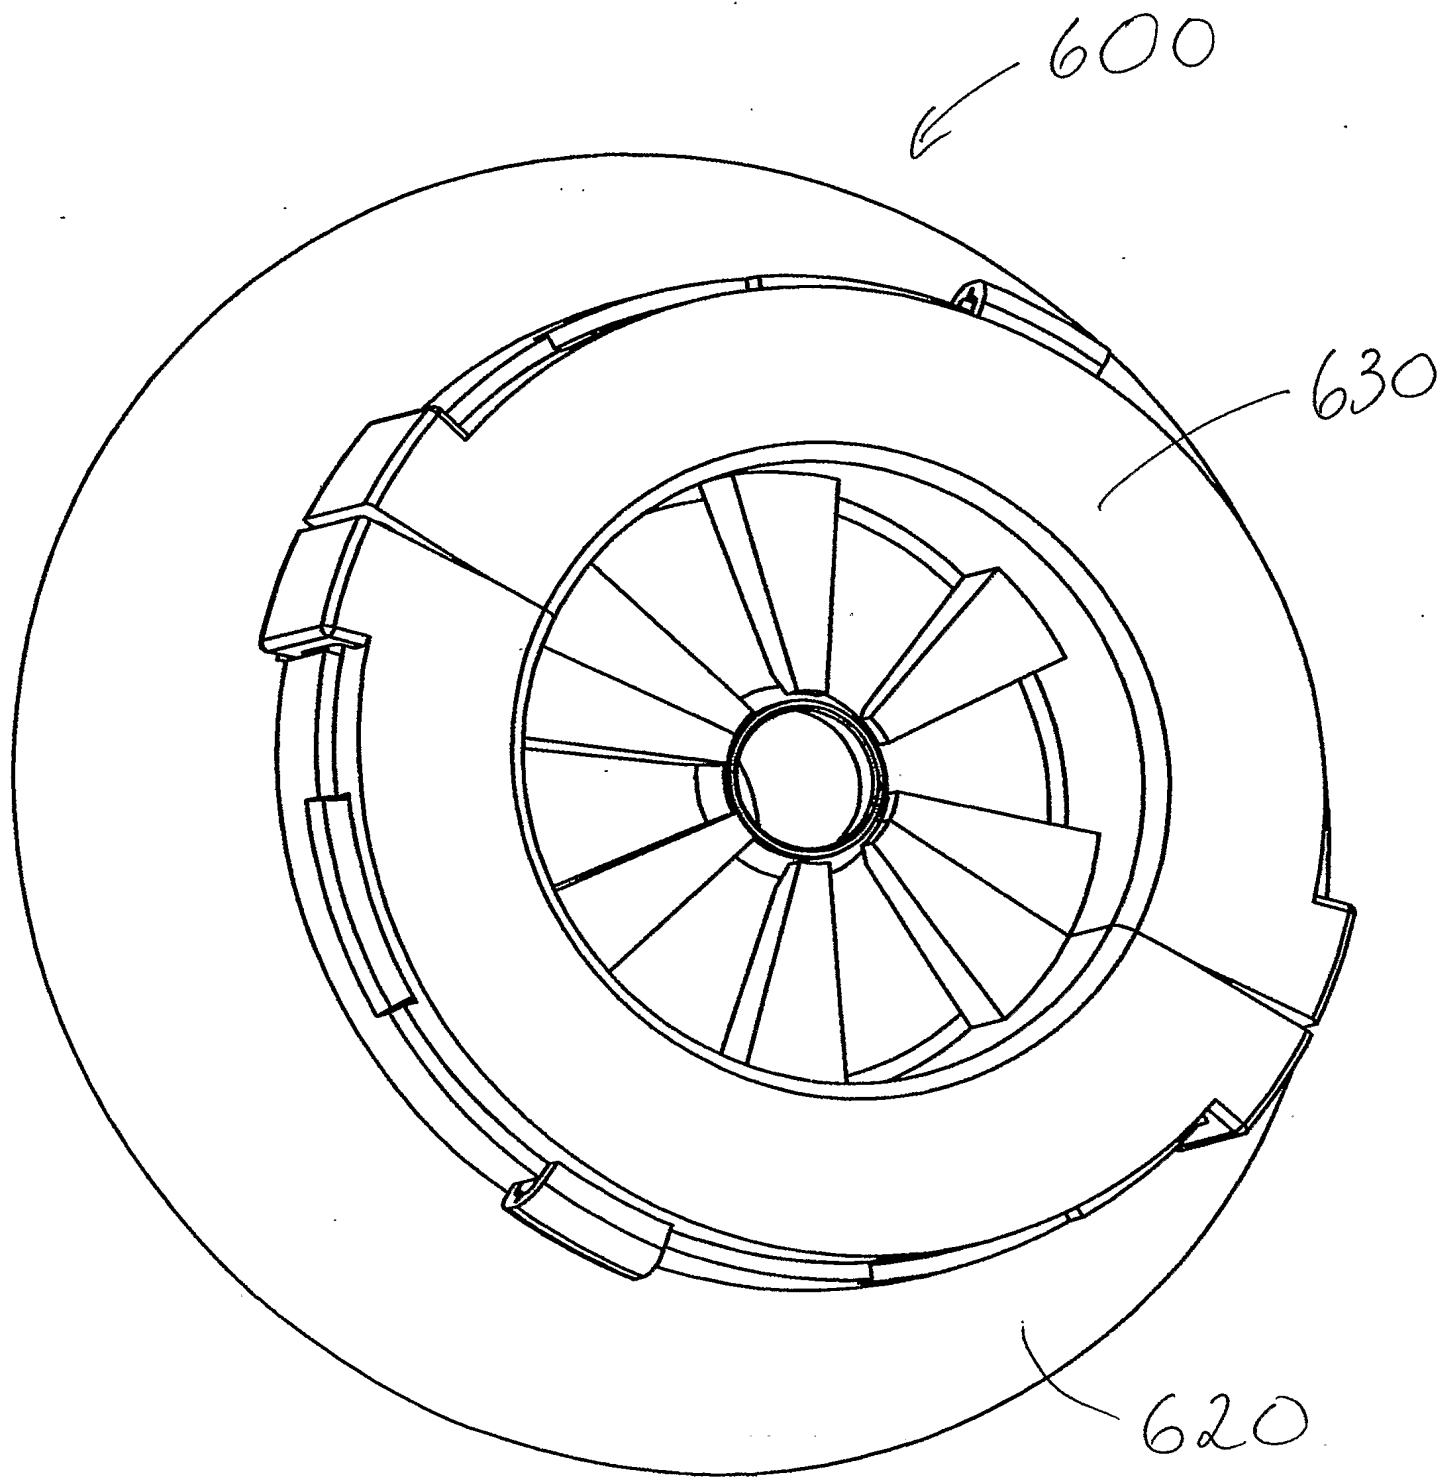

0400427-1

9/9

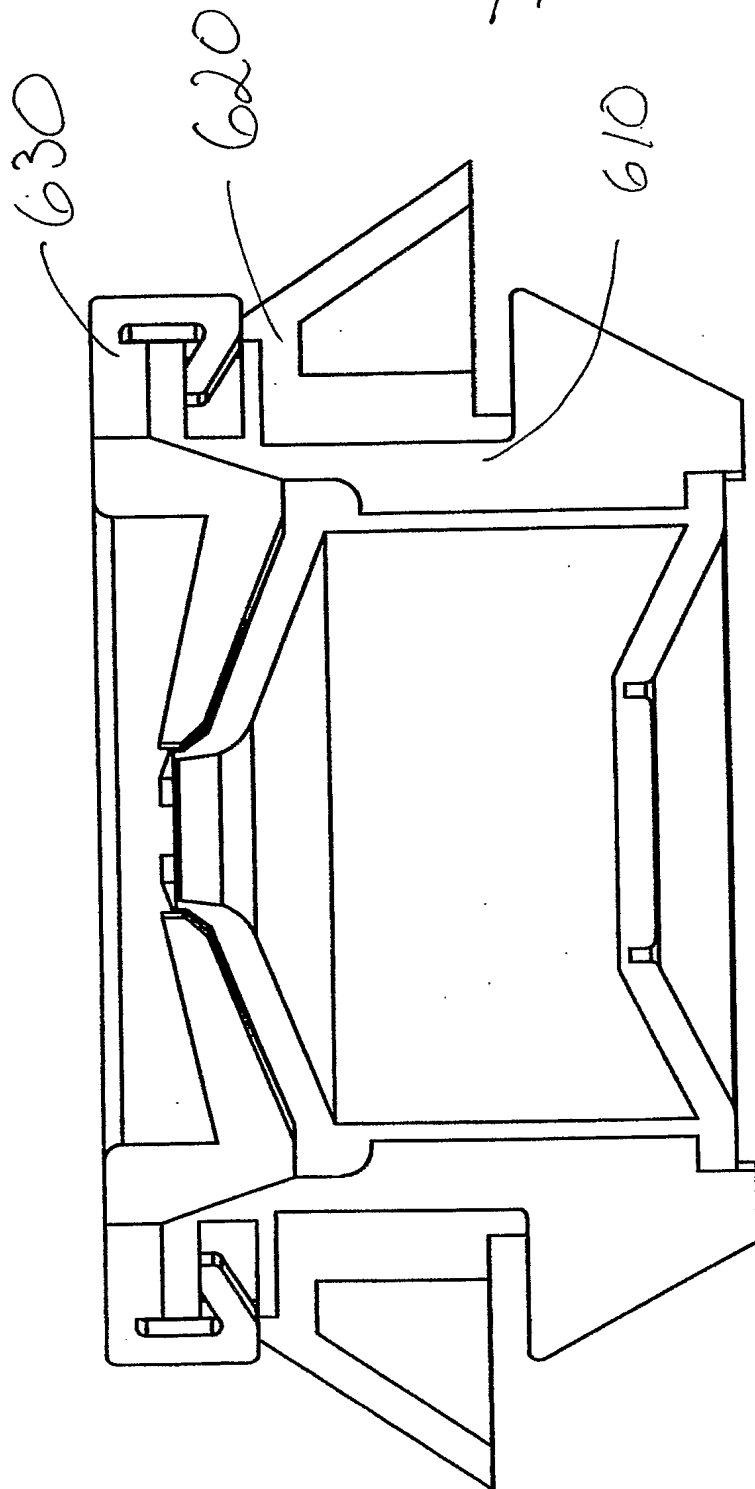

F16786

040042741